

ACI 304.6R-09(19)

IN-LB

Inch-Pound Units

SI

International System of Units

# Guide for Use of Volumetric-Measuring and Continuous-Mixing Concrete Equipment

Reported by ACI Committee 304



American Concrete Institute  
*Always advancing*



## **Guide for Use of Volumetric-Measuring and Continuous-Mixing Concrete Equipment**

Copyright by the American Concrete Institute, Farmington Hills, MI. All rights reserved. This material may not be reproduced or copied, in whole or part, in any printed, mechanical, electronic, film, or other distribution and storage media, without the written consent of ACI.

The technical committees responsible for ACI committee reports and standards strive to avoid ambiguities, omissions, and errors in these documents. In spite of these efforts, the users of ACI documents occasionally find information or requirements that may be subject to more than one interpretation or may be incomplete or incorrect. Users who have suggestions for the improvement of ACI documents are requested to contact ACI via the errata website at <http://concrete.org/Publications/DocumentErrata.aspx>. Proper use of this document includes periodically checking for errata for the most up-to-date revisions.

ACI committee documents are intended for the use of individuals who are competent to evaluate the significance and limitations of its content and recommendations and who will accept responsibility for the application of the material it contains. Individuals who use this publication in any way assume all risk and accept total responsibility for the application and use of this information.

All information in this publication is provided “as is” without warranty of any kind, either express or implied, including but not limited to, the implied warranties of merchantability, fitness for a particular purpose or non-infringement.

ACI and its members disclaim liability for damages of any kind, including any special, indirect, incidental, or consequential damages, including without limitation, lost revenues or lost profits, which may result from the use of this publication.

It is the responsibility of the user of this document to establish health and safety practices appropriate to the specific circumstances involved with its use. ACI does not make any representations with regard to health and safety issues and the use of this document. The user must determine the applicability of all regulatory limitations before applying the document and must comply with all applicable laws and regulations, including but not limited to, United States Occupational Safety and Health Administration (OSHA) health and safety standards.

Participation by governmental representatives in the work of the American Concrete Institute and in the development of Institute standards does not constitute governmental endorsement of ACI or the standards that it develops.

Order information: ACI documents are available in print, by download, through electronic subscription, or reprint and may be obtained by contacting ACI.

Most ACI standards and committee reports are gathered together in the annually revised the ACI Collection of Concrete Codes, Specifications, and Practices.

**American Concrete Institute**  
**38800 Country Club Drive**  
**Farmington Hills, MI 48331**  
**Phone: +1.248.848.3700**  
**Fax: +1.248.848.3701**

[www.concrete.org](http://www.concrete.org)

# Guide for Use of Volumetric-Measuring and Continuous-Mixing Concrete Equipment

Reported by ACI Committee 304

David A. Burg  
Chair

Hakim S. Abdelgader  
David J. Akers  
Casimir Bognacki  
Frederic Chapdelaine  
J. Mitchell Englestead  
Michael R. Gardner

Daniel J. Green  
John V. Gruber  
Neil R. Guptill  
Terence C. Holland  
Tarek S. Khan  
Larry G. Lepper\*

Gary R. Mass  
Larry W. Matejcek  
Avi A. Mor  
Soubhi Naddaf  
Dipak T. Parekh  
James S. Pierce

Royce J. Rhoads  
James M. Shilstone Jr.  
Boris Y. Stein  
William X. Sypher  
Samuel X. Yao

\*Subcommittee Chair.

*This guide includes a short history of and information on the basic design and operation of equipment, frequently called mobile mixers, used to produce concrete by volumetric measurement and continuous mixing (VMCM). Definitions, applications, and quality assurance testing are discussed. The use of this equipment is compared with weigh-batch-mixing equipment to highlight some of the limited differences.*

**Keywords:** batcher; continuous mixer; flowing (self-consolidating) concrete; fresh concrete; grout; high-early-strength concrete; latex; mixer; no-fines (pervious) concrete; overlay; precast concrete; shotcrete.

ACI Committee Reports, Guides, Manuals, and Commentaries are intended for guidance in planning, designing, executing, and inspecting construction. This document is intended for the use of individuals who are competent to evaluate the significance and limitations of its content and recommendations and who will accept responsibility for the application of the material it contains. The American Concrete Institute disclaims any and all responsibility for the stated principles. The Institute shall not be liable for any loss or damage arising therefrom.

Reference to this document shall not be made in contract documents. If items found in this document are desired by the Architect/Engineer to be a part of the contract documents, they shall be restated in mandatory language for incorporation by the Architect/Engineer.

## CONTENTS

### Chapter 1—Introduction and scope, p. 2

- 1.1—Introduction
- 1.2—Scope
- 1.3—History

### Chapter 2—Definitions, p. 2

### Chapter 3—Equipment, p. 2

- 3.1—Materials storage and measurement
- 3.2—Mixers
- 3.3—Equipment condition

### Chapter 4—Operations, p. 3

- 4.1—General
- 4.2—Production rates
- 4.3—Planning
- 4.4—Materials
- 4.5—Personnel qualifications

ACI 304.6R-09 supersedes ACI 304.6R-91 and was adopted and published March 2009.

Copyright © 2019, American Concrete Institute.

All rights reserved including rights of reproduction and use in any form or by any means, including the making of copies by any photo process, or by electronic or mechanical device, printed, written, or oral, or recording for sound or visual reproduction or for use in any knowledge or retrieval system or device, unless permission in writing

**Chapter 5—Applications, p. 304.6R-4**

- 5.1—General
- 5.2—Mixtures with short working times
- 5.3—Low-slump mixtures
- 5.4—Latex-modified overlays
- 5.5—Long unloading times
- 5.6—Concrete at remote sites
- 5.7—Making small deliveries
- 5.8—Precast operations
- 5.9—Hot weather concreting
- 5.10—Mining applications
- 5.11—Grouting and pile filling
- 5.12—Colored concretes
- 5.13—Emergency applications
- 5.14—Controlled low-strength fill
- 5.15—Fiber-reinforced concrete
- 5.16—Military applications

**Chapter 6—Quality control and testing, p. 304.6R-7**

- 6.1—General
- 6.2—Calibration
- 6.3—Production testing

**Chapter 7—Operational precautions, p. 304.6R-9**

- 7.1—General
- 7.2—Cold weather concrete
- 7.3—Hot weather concrete
- 7.4—Aggregate moisture
- 7.5—Rapid slump loss due to false set
- 7.6—Use of admixtures
- 7.7—Freshly mixed concrete properties

**Chapter 8—References, p. 304.6R-9**

- 8.1—Referenced standards and reports

**Appendix A—Sample calibration procedure/forms, p. 304.6R-11****CHAPTER 1—INTRODUCTION AND SCOPE****1.1—Introduction**

This document offers guidance on volumetric-measurement and continuous-mixing (VMCM) concrete production. The original and most common use of VMCM equipment is as mobile (either truck- or trailer-mounted) equipment. Because of its compact size, ability to produce mixed concrete, and versatility, a significant number of stationary units have been produced. This configuration provides a free-standing base and is typically powered by electrical circuits normally found in a precast plant or other industrial facility. Unless specifically noted, the information in this document applies to all VMCM equipment.

**1.2—Scope**

This guide contains background information to be considered when using the VMCM method. A discussion of other types of continuous-measurement equipment (conveyor belt scales or weigh-in-motion scales) is outside the scope of this report.

**1.3—History**

Volumetric measurement and continuous mixing have a long history in the production of concrete. For many years, the concept of “one shovel of cement, two shovels of sand, and three shovels of stone” was used to produce concrete. Patents on continuous mixers date back at least to 1913. It was not until volumetric measurement and continuous mixing were successfully combined in the early 1960s that general field use of this type of equipment began. The first commercial unit was delivered in 1964. Because of the detail of original patents, there was only one manufacturer of VMCM units until the early 1980s, when other manufacturers began to offer this type of equipment for concrete production.

By the mid-1970s, there were over 4000 VMCM machines in operation in the United States that were generally used to produce small volumes of concrete. During the late 1970s and early 1980s, specialty concretes needed for bridge-deck renovation and highway repair, which were difficult to produce in conventional transit mixers, were produced successfully with VMCM equipment. This application gave the equipment credence by proving that it could consistently produce close-tolerance, high-quality concrete. VMCM equipment was previously thought to be limited to producing special mixtures or small volumes; however, VMCM may be suitable for almost any concrete requirement.

Standards activities related to concrete produced by VMCM equipment have been increasing as the field units increase. In 1971, ASTM developed C685, and now maintains ASTM C685/C685M. The American Association of State Highway and Transportation Officials covers VMCM equipment in M 241. In 1993, ACI published ACI 548.4, “Standard Specification for Latex Modified Concrete (LMC) Overlays,” which lists mobile mixers as the equipment used to produce this product, and designates ASTM C685/C685M as the standard by which these units are defined. In 1999, a group of VMCM equipment manufacturers approached the National Ready Mixed Concrete Association (NRMCA) for assistance in forming the Volumetric Mixer Manufacturer Bureau (VMMB). The VMMB was formed, and in 2001 published VMMB 100-01, which defines the volume of ingredients needed to produce a cubic yard of concrete, and references ASTM C685/C685M uniformity requirements as the measure of accuracy in this type of equipment.

**CHAPTER 2—DEFINITIONS**

**measuring, volumetric**—dispensing an ingredient based on volume, either in discrete quantities or by continuous flow.

**mixing, continuous**—producing concrete by continuously blending ingredients in fixed proportions. The discharge of the concrete mixture may be started or stopped as required.

**CHAPTER 3—EQUIPMENT****3.1—Materials storage and measurement**

Measurement of material by volume can be accomplished by a variety of means. Rotary vane feeders (both horizontal and vertical axis), screw conveyors (both adjustable and fixed speed), drag chains, calibrated gate openings, variable-volume sliding compartments, and vibrating plate feeders

have been used to measure quantities of dry ingredients. Liquids can be introduced by air pressure, pumps, or cylinders, with the flow controlled by valves or timers and measured by flow meters. Whichever methods of material metering are used, they should be consistent to ensure the production of a proper mixture. Documents produced by the equipment manufacturers should be referenced for operating details of the various types of equipment. Cement, water, and admixtures are stored in separate containers and are measured separately. Fine and coarse aggregates are stored either separately or combined. If aggregates are stored and used in a combined state, they should be accurately preblended, and particular care should be taken to avoid segregation.

A meter or other indicator on the equipment records the amount and the rate of introduction of cement into the mixture, and this rate serves, directly or indirectly, to control the rate at which other ingredients are added. All systems are interconnected so that once they are calibrated and set to produce a specific concrete mixture, all ingredients are simultaneously and continuously measured into the mixer. This interconnecting allows either continuous or intermittent operation of the system to accommodate the quantities of the concrete needed. These interconnections should not be confused with the interlocks typically found in weigh-type batch plants. VMCM equipment is designed to allow the relative proportions of ingredients to be changed rapidly to vary the concrete mixture as required. Because the mixing chamber only holds approximately 4 ft<sup>3</sup> (0.10 m<sup>3</sup>), such changes can be made with little or no waste. Typical VMCM units carry enough materials to produce 6 to 10 yd<sup>3</sup> (4.5 to 8 m<sup>3</sup>) of concrete (Fig. 3.1). This limitation is based on axle loading limitations. Production of larger volumes of concrete or high rates of production will require provisions for recharging the material storage compartments.

### 3.2—Mixers

Most continuous mixers use an auger rotated in a sloped trough or tube. Materials are introduced at or near the lower end, and the mixed concrete is discharged at the other. This basic principle is the same for all VMCM equipment, although there are many individual variations. Augers are available in different lengths and diameters, can operate at different speeds, and can have continuous or interrupted flights. Troughs may have flexible or rigid bottoms and covered or open tops. The slope of the mixer may be fixed or adjustable. Lowering the trough (which is normally set at about a 15-degree inclination) may reduce the mixing time, while raising the trough may extend it. Mixing time can be adjusted by modifying the mixer angle of inclination, mixer rpm, mixer flighting configuration, throughput rate, or a combination of these. Actual mixing time from input to output is usually less than 20 seconds. Mixing times as long as 45 seconds have been achieved, but this comes at a considerable reduction in production throughput.

With this type of mixer, output is always equal to input, with a relatively small amount of material being mixed at any one time. Thorough mixing is accomplished in a very short time by applying high-shear, high-energy mixing to the

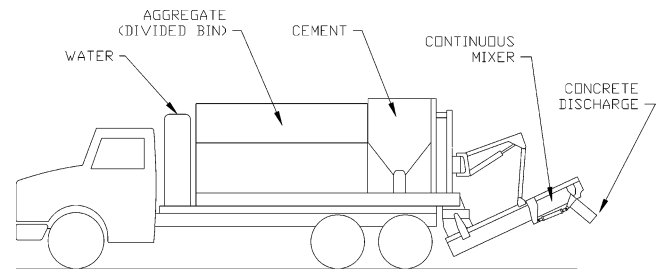


Fig. 3.1—Typical VMCM system.

material. A pivot at the base of most mixers allows them to swing from side to side.

### 3.3—Equipment condition

All proportioning and mixing equipment should be well maintained in accordance with the manufacturer's instructions. This point cannot be overemphasized. Equipment condition directly impacts the quality of the finished product.

Attention should be paid to the following areas:

- The cement dispenser should be clean and free of any buildup;
- Valves should operate smoothly and not leak;
- Any accumulation of materials on any controlling surface or opening in the system will alter the calibrated flow of materials;
- Mixer augers should not be allowed to wear beyond the manufacturer's recommended limits;
- There should be no buildup of concrete on the mixer auger surfaces;
- Delivery mechanisms should be properly adjusted and kept in good repair;
- There should be no leaks in the hydraulic or air systems;
- There should be no cut or damaged insulation on electrical wires; and
- All covers and guards should be securely in place.

ASTM C685/C685M provides guidance for evaluating mixer uniformity.

## CHAPTER 4—OPERATIONS

### 4.1—General

Volumetric measurement and continuous mixing are suitable for producing almost any concrete with appropriately sized aggregate, provided the equipment is operated with the same attention to detail as would be required to produce concrete by any other means. Most of the present equipment is truck- or trailer-mounted, or at least portable, and typically serves as its own material transport. The portability of the equipment makes it practical to bring the VMCM unit to the placement site, which can be an advantage in many applications. Having the unit on site also allows close control of concrete quality. Several manufacturers offer VMCM equipment designed to be placed in a fixed position in a precast plant or at a job site.

### 4.2—Production rates

Maximum production rates are dependent on the physical and mechanical characteristics of the VMCM unit. Discharge rates for 100 lb (45 kg) of cement range from